

# INDASH by PANAVISE®

I-75138-405

Page 1 of 2

**MOUNTING LOCATION:**  
Lower Right Side of Radio JBR

**TOOLS REQUIRED:**

Hook tool

T-20 Torx driver & ratchet

**HARDWARE INCLUDED:**

None

CELL PHONE & MEDIA MOUNT

INSTALLATION INSTRUCTIONS

PART#: 75138-405

MFG: VW

MODELS & YEARS:

(Pg. 1) Jetta Sedan 2005.5-2010,  
Jetta Sport Wagon 06-09, R32 2008  
GTI 06-09, Rabbit 06-09, GLI 08-09  
(Pg. 2) EOS 07-12, GTI & Golf 10-11,  
Jetta Sport Wagon 10-11

**\*\* ADVISEMENT \*\***

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.

**STEP #1:** With hook tool remove the upper air vent grill. Start by inserting the hook tool into the back corner of the grill, lift to release (2) plastic clips. Continue to release (8) more plastic clips. Disconnect the plug, set bezel aside. With T-20 torx driver remove the (1) exposed screw at the front of the vent shroud. Pull up on the back to release (2) spring clips. Tilt up the shroud and pull it towards the windshield to clear (2) 1/2" long tabs. Set shroud aside.

**STEP #2:** With hook tool assist pull the bezel that surrounds the air vent shroud from the back to release (3) plastic clips. Insert hook tool into the sides of the bezel to release (2) soft clips. This will allow the air vents to move. The air vents need to tilt up from the back side by the air vents to release (2) plastic clips that vertically separate the air vent bezel from the radio and climate control bezel. You will need to carefully pry up the air vent bezel at the upper side of the radio corners with a flat screwdriver. Release the air vent bezel assembly and set it aside.

**STEP #3:** With T-20 torx driver, remove the (2) screws that hold the radio and climate control bezel in place. Carefully remove the bezel around the radio and climate control. There are (8) small thin metal clips that hold it in place. Set bezel aside. With T-20 Torx, remove the (4) screws that hold the climate controls in place, and set climate control out of the way. Remove the (1) lower radio mounting screw, and the (1) screw that is directly below the right corner of the radio.

**STEP #4:** Place the InDash by PanaVise Mount over the (2) holes and replace the screws. Replace the climate control bezel and air vents in reverse order.

INSTALLATION IS NOW COMPLETE.  
ENJOY YOUR NEW INDASH by PANAVISE MOUNT.



Upper air vent removal



Torx screw to remove shroud



Flat screwdriver pry location to release plastic clip



InDash installed showing location



06-17-11

There may be recent updates to this Instruction Sheet, please visit our website or contact PanaVise Products, Inc. for the latest revision as well as for the most complete up-to-date PanaVise InDash Applications List: 7540 Colbert Dr., Reno, NV, Phone: 800.759.7535, 775.850.2900, Fax: 800.395.8002, www.panavise.com. © 2002 PanaVise Products, Inc.

# INDASH by PANAVISE®

I-75138-405

Page 2 of 2

## MOUNTING LOCATION:

Lower Right Side of Radio JBR

## TOOLS REQUIRED:

Hook tool

T-20 Torx driver & ratchet

## HARDWARE INCLUDED:

None

## CELL PHONE & MEDIA MOUNT

### INSTALLATION INSTRUCTIONS

PART#: 75138-405

MFG: VW

### MODELS & YEARS:

EOS 07-12, GTI & Golf 10-11,

Jetta Sport Wagon 2010-2011

(Pg. 1) Jetta Sedan 2005.5-2010,

Jetta Sport Wagon 2006-2009, R32 2008

GTI 06-09, Rabbit 06-09, GLI 08-09

## \*\* ADVISEMENT \*\*

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.

### Start here for EOS 2007-2010 & 2012

STEP #1: With dash tool remove the bezel around the radio, climate control, and switches. Insert the tool into the lower right side of bezel pry to release the (6) clips. *On 11-12 (12) clips.*

STEP #2: Remove the lower right side radio T-20 Torx screw. Then remove T-20 screw between radio and climate control.

STEP #3: Place the InDash by PanaVise Mount over screw holes and replace screw. Replace the bezel.



EOS 2007 Final Installation Picture



EOS 07-11 Mounting screw locations  
Climate Controls vary. 2011 above.

### Start here for GTI, Golf 2010-2011, & Jetta Sport Wagon 2010-2011:

STEP #1: With dash tool remove the bezel around the radio, starting at the bottom releasing (8) clips. Remove the climate control bezel, (4) clips.

STEP #2: With T-20 Torx driver, remove the lower right side radio screw, and right side screw between the radio and climate control. Angle the InDash by PanaVise Mount over the top screw hole over the right side radio screw hole. The lower bracket hole will not match up with the lower removed screw hole, it does sit below the screw and is held in place by screw head. Replace the (2) removed screws.


STEP #3: Carefully replace the (2) bezels.



GTI & Golf 10-11 Final Installation Picture



GTI & Golf in place, see detail below

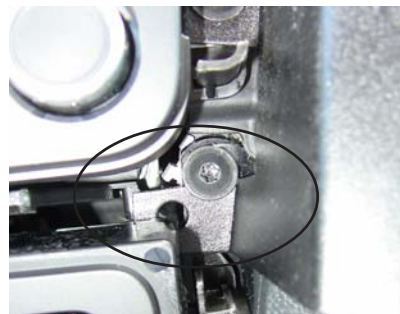

GTI & Golf 10-11 radio bezel



GTI & Golf 10-11 climate control bezel

06-17-11

